



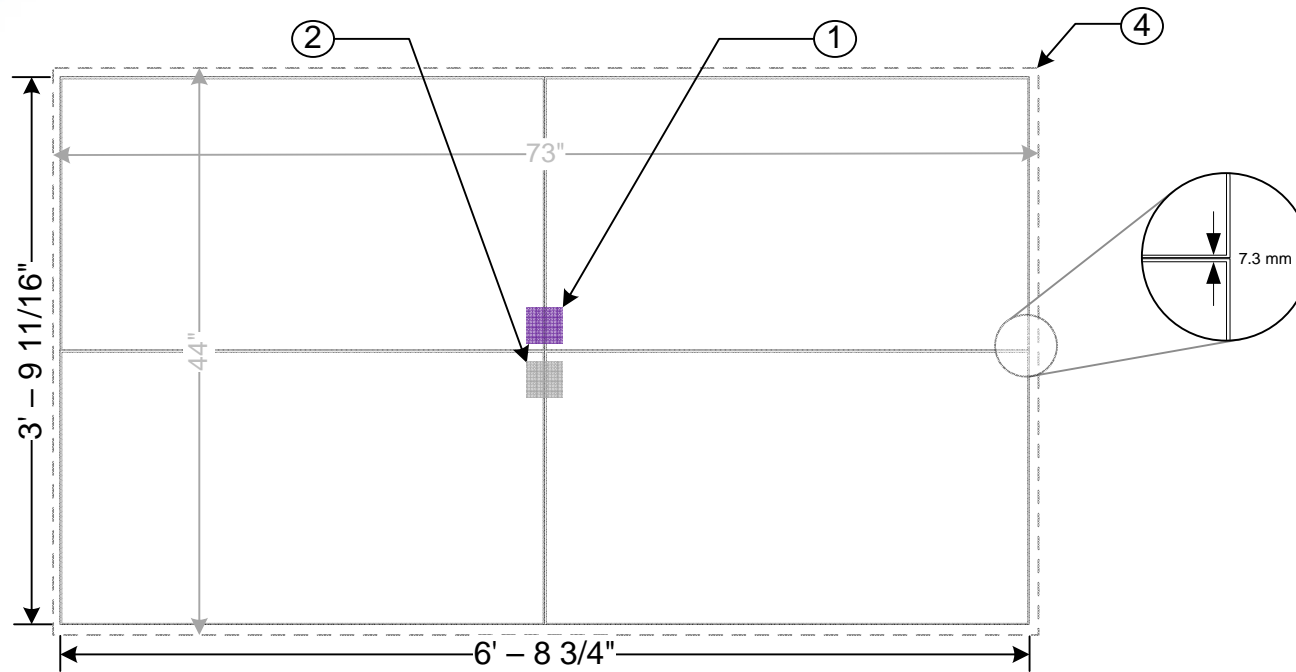
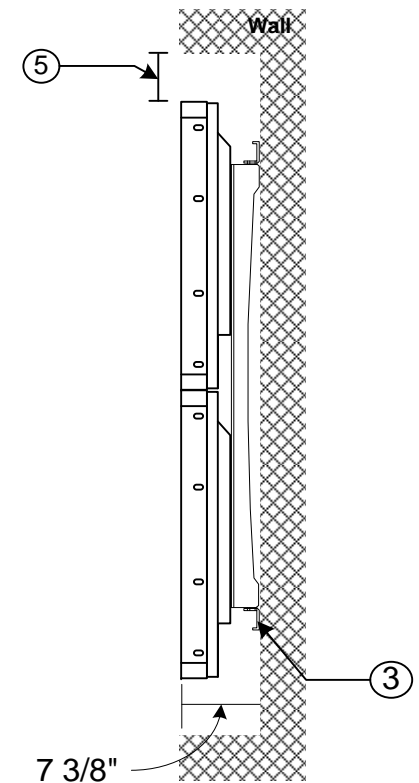
**46" LCD Display**  
**Manufacturer: NEC**  
**Model: X462UN**

- Weight: 64.6 lbs
- Dimensions: 40.38" (w) x 22.83" (h) x 5.0" (d)
- Power Supply: 3.6 – 1.45A @ 100-240VAC, 50/60Hz
- Native Resolution: 1920 x 1080
- Contrast Ratio: 3000:1
- Operating Temperature: 5 – 40 C
- Brightness: 700 cd/m<sup>2</sup> (max), 500cd/m<sup>2</sup> (typ)
- Audio: Internal Speaker 10W + 10W, External Speaker Jack 15W+15W (8 ohm), Output, 3.5mm

**Integrated Rise Engine**



- Weight: 3.3 lbs
- Power Consumption: 38W max via internal connection
- Operating System: Windows 7
- RAM: 2GB
- Processor: Intel Core i5 2.4GHz
- Hard Driver: 160GB
- Graphics Card: Intel 3400 Chipset
- Connection: HDMI via internal connection
- Output: Display Port
- USB: 2 (USB 2.0)

**Front View**

**Side View**

**Technical Specifications**

- **Weight:**
- **Dimensions:**
- **Power Consumption:**
- **Native Resolution:**
- **Contrast Ratio:**
- **Operating Temperature:**
- **Brightness:**

**Overall Specifications**

278 lbs  
 80.76" (w) x 45.66" (h) x 7.38" (d)  
 14 - 5.8A @ 100-240VAC, 50/60Hz  
 1920x1080  
 3000:1  
 5° to 40° C  
 500 cd/m<sup>2</sup> (typ)

**Comments:**

- ① Flush 120VAC Outlet – BY OTHERS
- ② 1 Flush CATx Outlet for LAN Connectivity – BY OTHERS
- ③ Wall Mounting Bracket
- ④ Area of wall to be reinforced – 1/2" plywood recommended – BY OTHERS
- ⑤ 4" opening around display for recessed installations to allow for adequate ventilation – BY OTHERS



CLIENT FIREWALL



CLIENT LAN



### Browser Requirements:

All browsers supported. Internet Explorer required the Google Chrome Frame Plugin

### Network Requirements:

From LAN, Integrated Rise Engine requires access to the following:

- <http://rvauser.appspot.com>
- <http://rvagadgets.appspot.com>
- <http://rvashow.appspot.com>
- <http://rvaserver.appspot.com>