


# 64H PIXEL 6MM FLEXIBLE CABINET LED DISPLAY

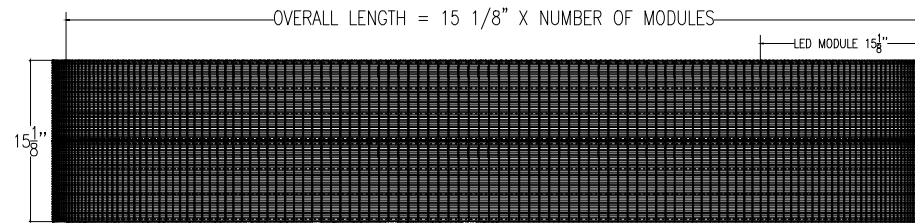


← TEXT FLOW DIRECTION

FRONT VIEW

BEGINNING OF DISPLAY

EACH SECTION IS LABELED A1 , A2 , A3 ... SHOULD BE INSTALLED FOLLOWING THE SEQUENCE STARTING FROM THE RIGHT FACING FRONT

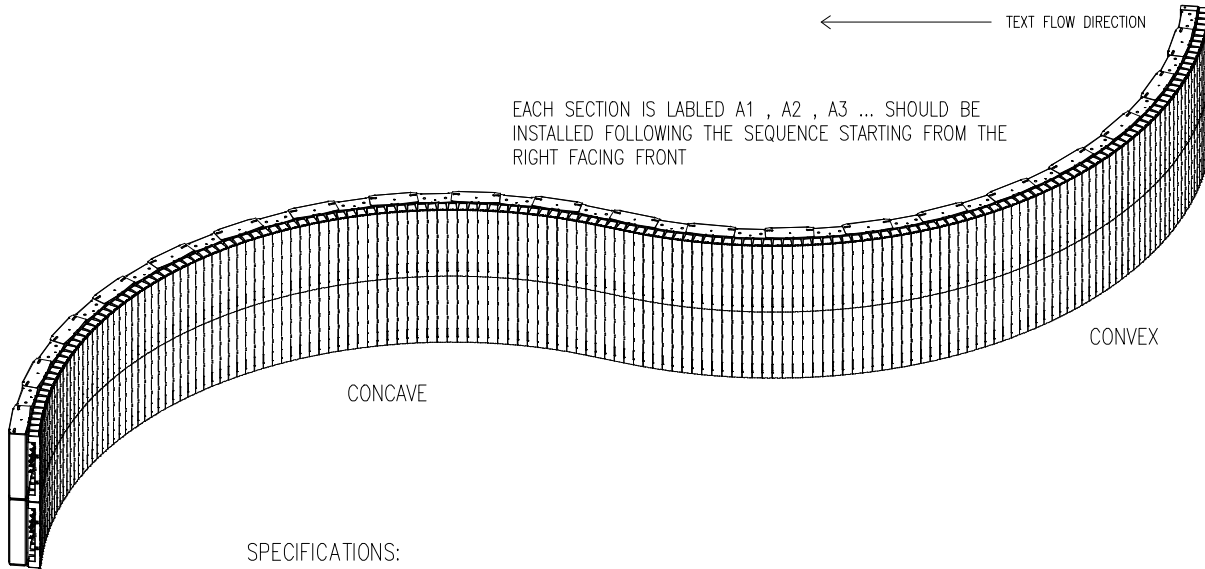

DATA / POWER ACCESS ON RIGHT SIDE WHEN FACING FRONT OF TICKER


8' LONG REMOVABLE 120VAC  
RIGHT ANGLE POWER CORD  
16AWG

WIFI ACTIVATION  
RJ45/CAT 5 CABLE DATA ENTRY  
OPTIONAL

POWER OUTLET LOCATION  
OUTLETS CAN BE LOCATED ABOVE SIGN.  
SIGNS LONGER THAN 48FT REQUIRE AN  
ADDITIONAL DEDICATED OUTLETS EVERY  
48FT OF SIGN.

## SPECIFICATIONS:

- PIXEL PITCH : .23" (6MM)
- COLOR: RGB (FULL COLOR)
- CHARACTER HEIGHT: 15.02 INCH (64H)
- ELECTRICAL REQUIREMENTS: 120VAC-220VAC/SINGLE PHASE MANUALLY SWITCHED  
@ 120 VAC INDOOR - 27 WATTS/FT  
POWER INPUT: POWER CORD
- DATA: XPICO WIFI OR ETHERNET
- CHASSIS METAL & FINISH: STEEL WITH BLACK POWDER COAT
- SIGN MOUNTING: WALL MOUNT
- WEIGHT : 9 LBS/FT
- MINIMUM RADIUS : 2 FT FOR CONCAVE AND CONVEX

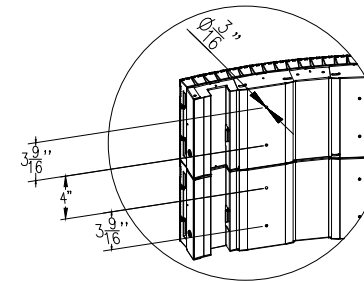

COMPANY \_\_\_\_\_ TITLE \_\_\_\_\_

SIGNED \_\_\_\_\_ DATE \_\_\_\_\_

PROJECT  
RISETICKER SHOP DRAWING

TITLE  
FLEX LED TICKER DISPLAY (64 PIXEL-6MM)

DRAWING NO  
RISETICKER-646-FLEX

SCALE :	DRAWN BY:	DATE :
1 / 1	JHW	4 / 12 /22