



48H PIXEL 4MM FLEXIBLE CABINET LED DISPLAY



POWER OUTLET LOCATION
 OUTLETS CAN BE LOCATED ABOVE/BELOW BUT CLOSE TO
 THE SLOT WHERE THE CABLES COME OUT FROM SIGN.
 SIGNS LONGER THAN 9'7FT REQUIRE AN ADDITIONAL
 DEDICATED OUTLETS EVERY 9'7FT OF SIGN.

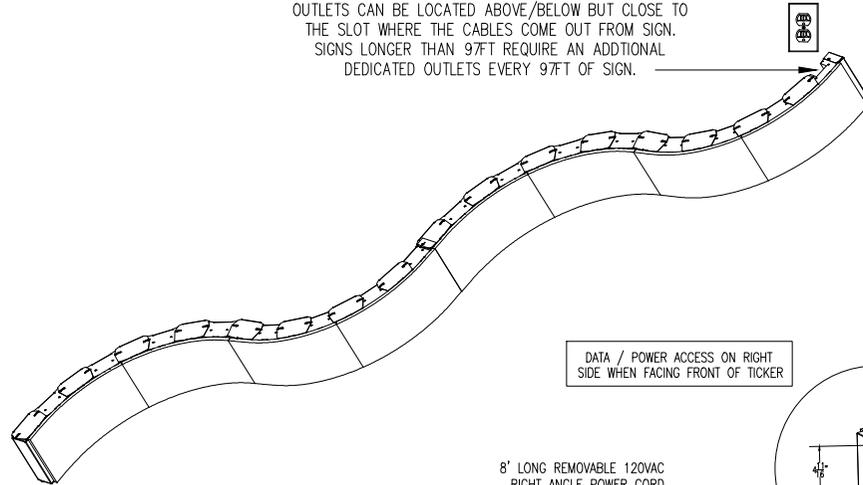

BEGINNING OF DISPLAY


DATA / POWER ACCESS ON RIGHT
 SIDE WHEN FACING FRONT OF TICKER

8' LONG REMOVABLE 120VAC
 RIGHT ANGLE POWER CORD
 16AWG
 WIFI ACTIVATION
 RJ45/CAT 5 CABLE DATA ENTRY
 OPTIONAL

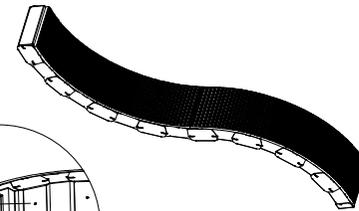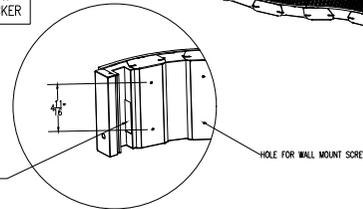

CONCAVE

CONVEX

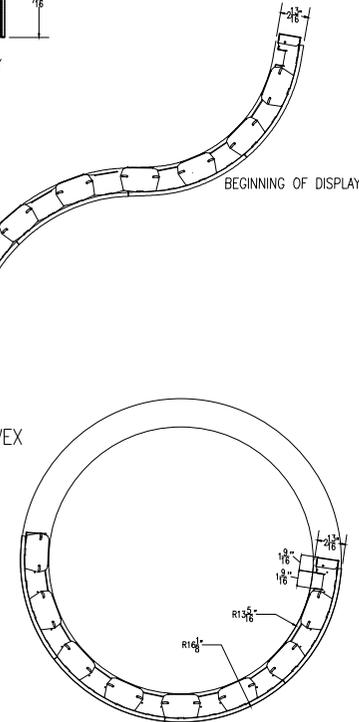

EACH SECTION IS LABELED A1 , A2 , A3 ... SHOULD BE
 INSTALLED FOLLOWING THE SEQUENCE STARTING FROM THE
 RIGHT FACING FRONT

SPECIFICATIONS:

- PIXEL PITCH : .16" (4MM)
- COLOR: RGB (FULL COLOR)
- CHARACTER HEIGHT: 7.56 INCH (48H)
- ELECTRICAL REQUIREMENTS: 120VAC-220VAC/SINGLE PHASE MANUALLY SWITCHED

@ 120 VAC INDOOR - 13.5 WATTS/FT
 POWER INPUT: POWER CORD

- DATA: XPICO WIFI OR ETHERNET
- CHASSIS METAL & FINISH: STEEL WITH BLACK POWDER COAT
- SIGN MOUNTING: WALL MOUNT
- WEIGHT : 5.2 LBS/FT
- MINIMUM RADIUS : 2.5 FT FOR CONCAVE AND CONVEX



COMPANY _____		TITLE _____
SIGNED _____		DATE _____
PROJECT RISETICKER SHOP DRAWING		
TITLE FLEX LED TICKER DISPLAY (48 PIXEL-4MM)		
DRAWING NO RISETICKER-484-FLEX		
SCALE : 1 / 1	DRAWN BY: JHW	DATE : 3 / 3 / 23