

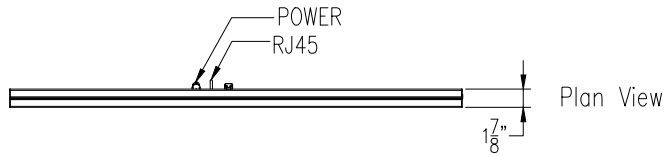
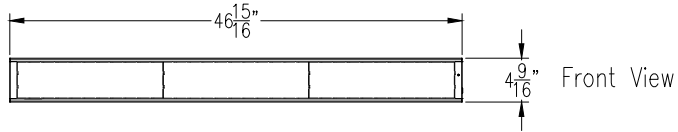


16 X 192 P6 FRONT SERVICE

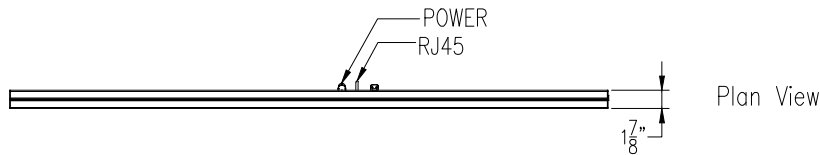



- ELECTRICAL REQUIREMENTS: 120VAC-220VAC/SINGLE PHASE MANUALLY SWITCHED @ 120 VAC INDOOR - 41 WATTS- WEIGHT : 6 LBS

16 X 256 P6 FRONT SERVICE

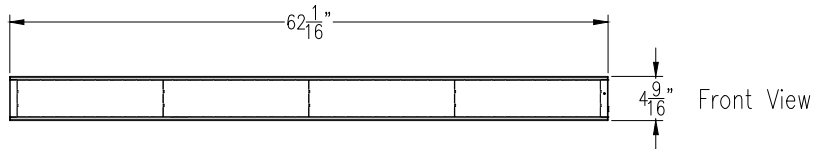

- ELECTRICAL REQUIREMENTS: 120VAC-220VAC/SINGLE PHASE MANUALLY SWITCHED @ 120 VAC INDOOR - 55 WATTS- WEIGHT : 8 LBS


16 X 352 P6 FRONT SERVICE

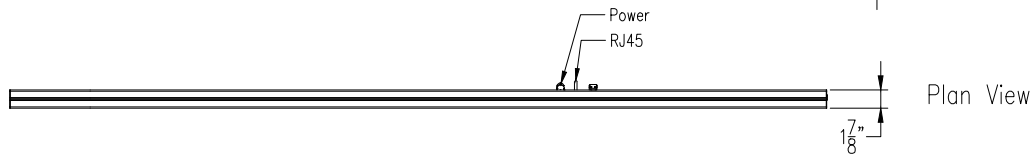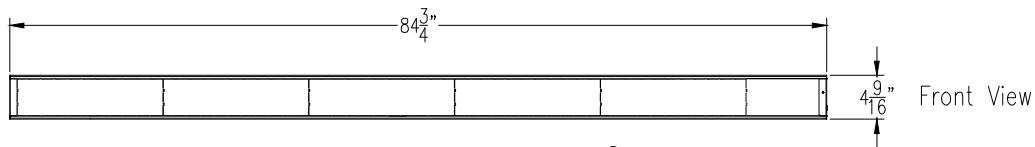


- ELECTRICAL REQUIREMENTS: 120VAC-220VAC/SINGLE PHASE MANUALLY SWITCHED @ 120 VAC INDOOR - 79 WATTS- WEIGHT : 15 LBS

SPECIFICATIONS:

- PIXEL PITCH : 23" (6mm)
- COLOR: RGB (FULL COLOR)
- CHARACTER HEIGHT: 3.78 INCH (16H)
- POWER INPUT: POWER CORD
- DATA: XPICO WIFI OR ETHERNET
- CHASSIS METAL & FINISH: ALUMINIUM WITH EXTRUDED BLACK POWDER COAT
- SIGN MOUNTING: WALL MOUNT OR CEILING MOUNT



		
COMPANY _____	TITLE _____	
SIGNED _____	DATE _____	
PROJECT RISETICKER SHOP DRAWING		
TITLE LED TICKER DISPLAY (16 PIXEL-6MM)		
DRAWING NO RISETICKER-166F		
SCALE : 1 / 1	DRAWN BY: JHW	DATE : 4 /14/ 23